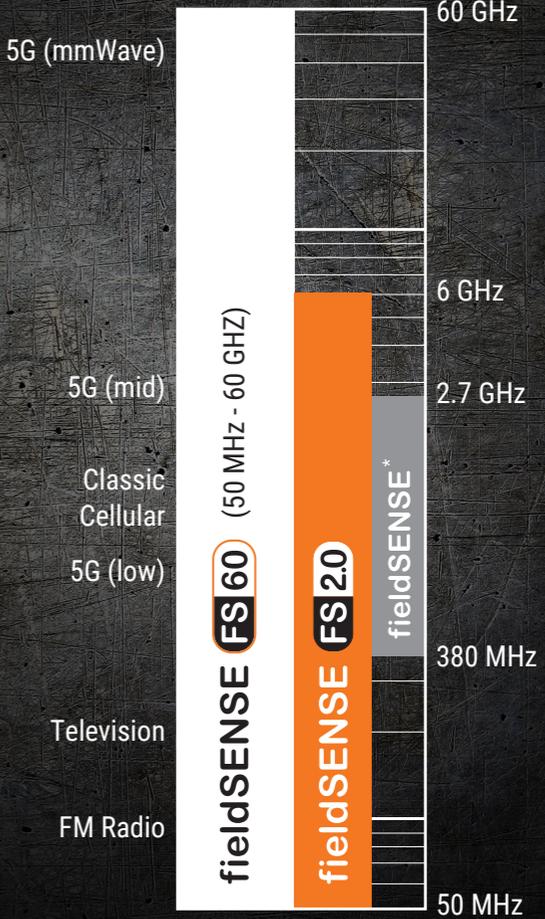


WE'VE GOT YOU COVERED

Product Comparison Chart

	fieldSENSE FS60	fieldSENSE FS20	fieldSENSE	Frequency range
				
Frequency coverage	50 MHz – 60 GHz	50 MHz – 6 GHz	380 MHz – 2.7 GHz	
Recommended retail price	USD 799	USD 599	*Not available	
Usage	Full spectrum: FM through to mmWave 5G	FM, television through to mid band 5G	Legacy cellular only	
Frequency response	Shaped (Occupational / Controlled)			
Frequency response to	ICNIRP (2020) FCC (NCRP) OET65 (1997) EU Directive 2013/35/EU Canada Safety Code 6 (2015)			
Sensor polarization	Spherical dual polarised Isotropic (± 3 dB < 6 GHz)		Linear	
Probes	E-field & H-field (3 orthogonal probes each)		E-field (omni-directional)	
Result type	Cumulative exposure in relation to occupational exposure limits in percentage			
Data logging	E, H & Maximum, 6-min average of Maximum		No	
Voice notes	Yes		No	
Fall detection alarm	Yes – 3-axis acceleromoter		No	
Calibration interval	Recommended two-yearly calibration			
Support	Calibration & refurbishment		Calibration	
Batteries	2x AAA (LR03) Alkaline batteries – 6-12 months average use		N-type Alkaline – 6-12 months on average use	
Attachment	Harness clip and coiled lanyard Elastomer strap and wrist strap	Elastomer strap and wrist strap	Wrist strap	
Dimensions	146 x 26 x 42 mm 5.7 x 1 x 1.7 inches		132.3 x 41.3 x 23.5mm 5.2 x 1.6 x 0.9 inches	
Weight (incl. batteries)	115 g 0.25 lb		120 g 0.26 lb	